



## THE "STEALTH" - Anchor

*Ideal for all marine applications, and the primary anchor used to hold the oil booms in the 1993 Tampa Bay Oil Spill.*

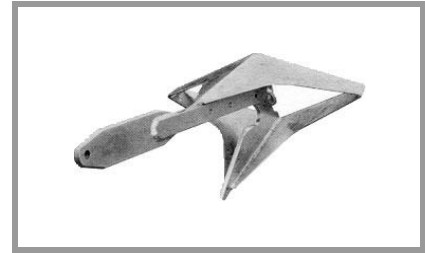

*The "Stealth" Anchor performs with excellence as it superbly veers 360°, always compensating for wind and current changes, in all types of sea beds. It is made from 2.5 -18 Kg., 5.5- 40Lb.*

Specifications of standard sizes:				
Main Anchor	Anchor Weight		Approx. Holding Power	
Item #	Kg.	Lb.	Kg.	Lb.
4002	2.5	5.5	850	1900
4003	3.5	8	950	2100
4005	5	11	1300	2900
4007	7	15	1900	4200
4009	9	20	2100	4500
4013	13	29	2800	6200
4018	18	40	3500	7700

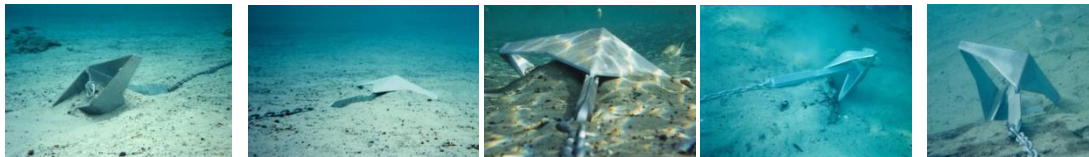

[www.hansanchor.com](http://www.hansanchor.com)

For other marine and boating uses see "**Selection Guide**" and the "**GTFL - Ground Tackle Force Load**" recommends the right size anchor for any vessel.

[www.hansanchor.com/-11\\_selectionguide.htm](http://www.hansanchor.com/-11_selectionguide.htm)  
[www.hansanchor.com/-12\\_gftl.htm](http://www.hansanchor.com/-12_gftl.htm)

**Contact us: [info@marboom.com](mailto:info@marboom.com)**